


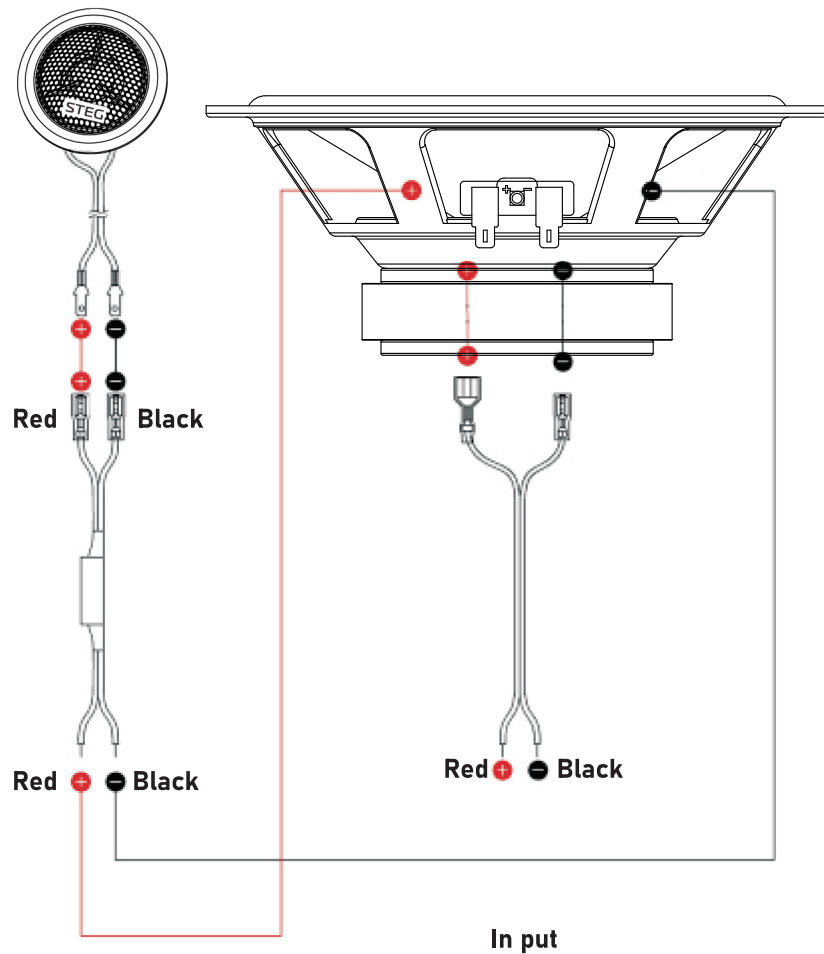

- Thanks for your review
- Grazie per la tua recensione

SEC

COMPONENT SPEAKERS


SEC-650C

L'installazione Istruzioni per
Installation Instructions




ITALY
www.gt-trading.it
info@gt-trading.it

Surface mounting option

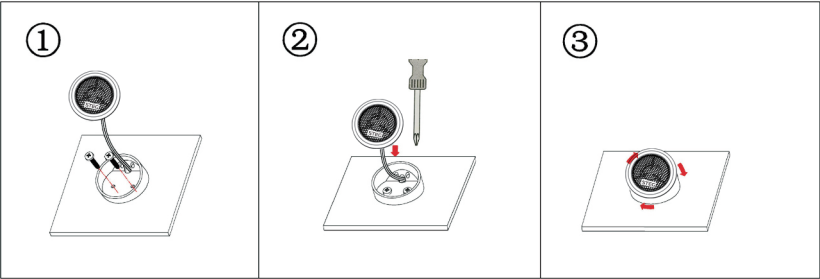

Flush mounting for 50mm cutout

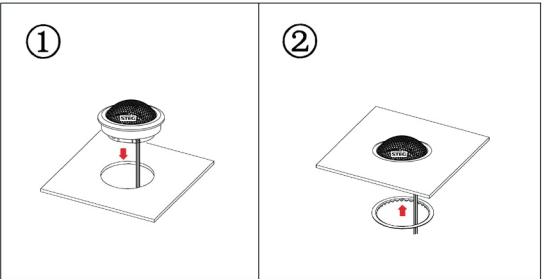

Specifications		
2-Way System		SEC-650C
Nominal Impedance		4 ohm
Power Handling		60W
Max.Transient Handling		120W
Sensitivity(2.83V/1M)		90dB
Frequency Response		60-20000Hz
Voice Coil Diameter	Woofer:	25mm(1")
	Tweeter	13mm (0.5")
Voice Coil Wire		Copper
Magnet System	Woofer:	High grade ferrite magnet
	Tweeter	neodymium
Mounting Depth		65mm

