

K series

K 6 C WOOFER

Gttrading保留对所示产品进行修改或改进的权利，恕不另行通知 - 所示产品的可用性可能会有所更改 - 本用户指南中描述的产品仅代表可用STEG产品的一部分 - 提及的所有品牌和商标 仅用于描述目的，所有权利归属于所有者 - 禁止全部或部分复制本用户指南。

G.T.trading reserves the right to make modifications or improvements to the products illustrated without notice thereof-The availability of the products illustrated is subject to change-The products described in this User's Guide represent just a part of the STEG products available-All brands and trademarks mentioned have been used exclusively for description purposes and all rights belong to the respective owners-Total or partial reproduction of this User's Guide






- ▶ 长时间在大音量下聆听音乐可能会损害您的听觉，并影响您的驾驶安全。
- ▶ Listening to high sound pressure levels over a prolonged period of time may harm your hearing.

主要特点：


- 32.5 mm耐温音圈
- 高灵敏度 88dB @ 2.83V
- 透气铝压铸盆架
- 特制云母材质鼓纸
- 高性能铁氧体外磁
- 低阻尼橡胶边
- CNC精加工T铁

安装方式：

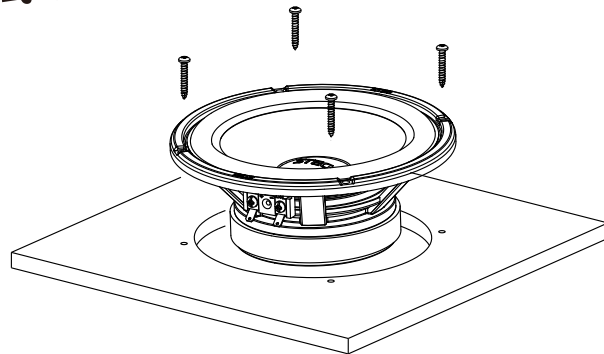

K 6 C 技术参数：


阻抗 (Ω)	4 Ω
频率响应 (Hz)	50-8K Hz
持续功率 (W)	60 W
灵敏度 (2.83V/1M)	88 dB
Qms	4.424
Qes	0.599
Qts	0.525
Mms (g)	14.662
Vas (Ltr)	15.92
磁路类型	Ferrite
安装直径 (mm)	148
安装深度 (mm)	77

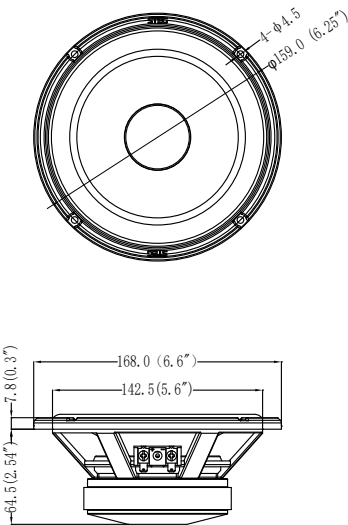

Key Features：



- 32.5mm high temperature voice coil
- Vented die cast aluminum chassis
- High grade Ferrite magnet
- CNC finishing motor metal parts
- High output SPL 88dB @ 2.83V
- Special mica material cone
- Low damping rubber surround

K 6 C Installation：

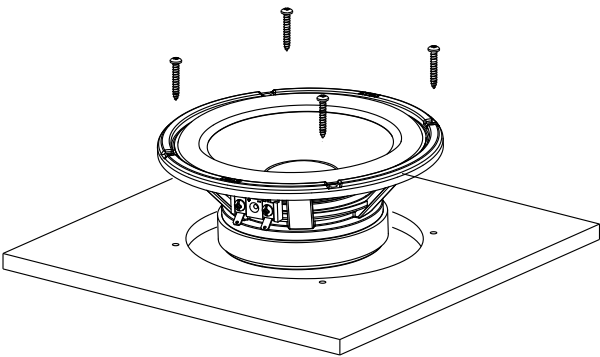

K 6 C Technical Parameters :

Impedance (Ω)	4 Ω
Frequency Response (Hz)	50-8K Hz
Rated Power (W)	60 W
Sensitivity (2.83V/1M)	88 dB
Qms	4.424
Qes	0.599
Qts	0.525
Mms (g)	14.662
Vas (Ltr)	15.92
Magnet	Ferrite
Mounting Diameter	148
Mounting Depth	77

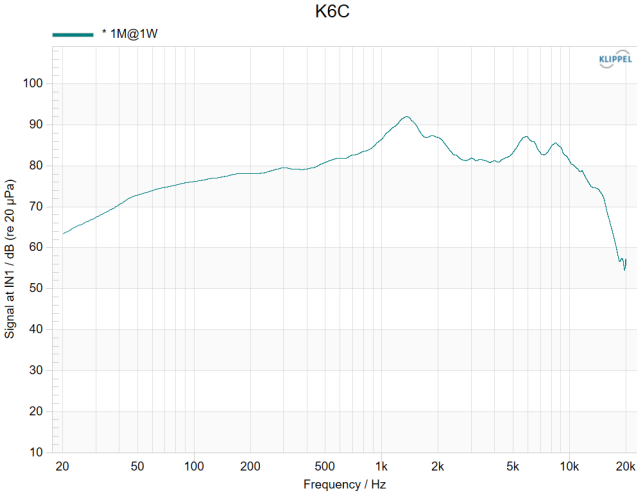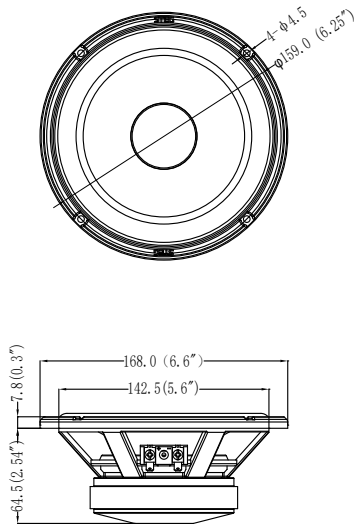

► 感谢您的查阅！

► Welcome to consult!